



# **MAGICUT**

Robust feature / Simple operation

# **MAGICUT**

# The best all-rounder CNC for job shop and large scale production.




#### **CNC** controller

- 15" screen
- Multi-language selection
- USB port
- Recall the last cutting point



# **MAGICUT**

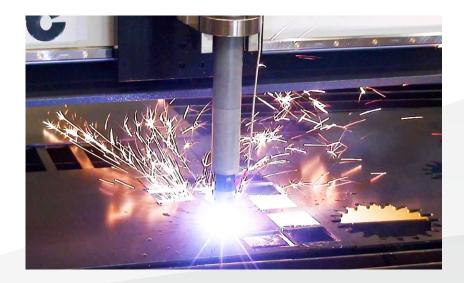

#### **Optional accessories**

- Laser Pointer
- Oxyfuel Cutting Torch:50mm maximum material thickness
- Offline Nesting Software

#### **OPC**

THC setting panel, plasma switch and emergency stop button.



#### **Signal Tower**

Waring indication and machine fault management.



#### Servo motor drive

Closed loop control with constant motion torque.



#### Rugged structure

Solid table structure for high cutting precision.




#### **Laser Pointer**

Simple laser pointer for accurate positioning.



#### THC

Combined anti-collision, IHS and THC functions for reliable air plasma cutting.





### **Specification**

Model	Unit	Magicut 1212 (4' x 4')	Magicut 1224 (4' x 8' )	Magicut 1530 (5'x 10')
Power input	~	1 Phase 200~220V 50/60 Hz, 20A		
Motor driven unit		AC Servo motor		
Travel drive method		Precision rack & Pinion		
Travel rail		Double linear roller guideway		
Overall width (A)	mm	1,850	1,850	2,250
Overall height (B)	mm	1,600	1,600	1,600
Overall length (C)	mm	2,500	3,700	4,450
Cutting width (D)	mm	1,250	1,250	1,600
Cutting length (E)	mm	1,250	2,450	3,100
Max. Cutting speed	m/min		8(315 ipm)	
Max. Travel speed	m/min		12 ( 472 ipm )	
Position accuracy	mm	+/-0.1 ( 0.004" )		
Repeatability	mm		+/-0.05 ( 0.002" )	
Weight	Kg	750	930	1,300

Note: Other input voltage is available.

#### **Dimensions**





#### **UNITED PROARC CORPORATION**

No.3 Gungye 10th Road, Pingjen Industrial Park, Pingjen Dist.,Taoyuan City 32459, Taiwan Tel:886-3-4696600 Fax:886-3-4696969 E-mail:sales@proarc.com.tw